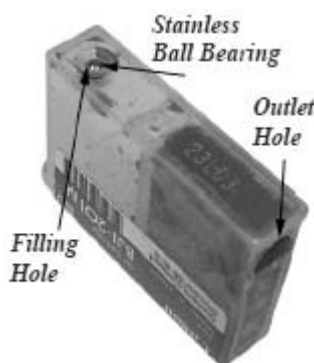# Refill Instructions
Canon BJI-201B-C-M-Y-PBK

1. Turn the cartridge upside down, and push in the ball bearing that seals the filling hole by using a pointed object.

NOTE: On Canon's newer cartridges the filling hole is on the top of the cartridge under the label, however, on their newest cartridges they have totally removed the filling hole altogether. In this case it would be necessary to make a drill an 1/8" hole for the needle to be inserted. Make this hole in the same location, as shown. Seal hole with the plug provided.

2. Attach the needle to the syringe and fill with the correct color ink.

3. Inject approximately 5 ml of ink slowly into the filling hole until the chamber is almost full. Unused ink may be returned to the bottle.

4. Seal the filling hole with the plug provided, making certain that the plug is completely inserted into the cartridge.

Additional Note: In some cases the sponge is deteriorated and it cannot hold the ink which will cause ink to leak out the outlet hole. If this happens an alternate method of refilling is to drip ink on to the sponge until it is soaked. (Your total page output will be less than a complete fill.)

5. The syringe with water and dry for future use, or use with a different color ink.

6. Reinsert the cartridge and run a priming cycle as per printer instructions.

Note: Immediately refill any empty cartridges.